


N 70, Gas hob, 60 cm, Tempered glass  
T26CS49S0



COOKING PASSION SINCE 1877

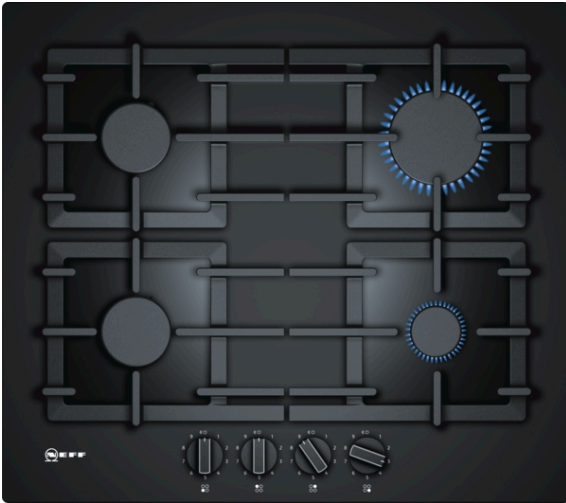

The gas hob with a tempered glass surface and adjustable FlameSelect.

- ✓ Tempered Glass Surface - extremely easy-to-clean surface.
- ✓ FlameSelect® – Gain ultimate control of your flame.
- ✓ Pan Supports - continuous cast-iron pan supports for maximum stability and cooking convenience.
- ✓ Sword Knobs - a better feel and easier to operate, the new knob in an attractive design.
- ✓ Installation - you have the option of installing the gas hob either flush or slightly raised.

#### Features

##### Technical Data

Product name/family : gas hob w integrated controls  
Construction type : Built-in  
Energy input : Gas  
Total number of positions that can be used at the same time : 4  
Type of control setting devices : sword knobs  
Required niche size for installation (HxWxD) : 45 x 560-562 x 480-492 mm  
Width of the appliance : 590 mm  
Dimensions : 45 x 590 x 520 mm  
Dimensions of the packed product (HxWxD) : 141 x 651 x 578 mm  
Net weight : 15.112 kg  
Gross weight : 16.0 kg  
Residual heat indicator : without  
Location of control panel : Hob front  
Basic surface material : Tempered glass  
Color of surface : Black  
Color of frame : Black  
Approval certificates : CE, Eurasian  
Length of electrical supply cord : 100 cm  
EAN code : 4242004203322  
Electrical connection rating : 1 W  
Gas connection rating : 7500 W  
Fuse protection : 3 A  
Voltage : 220-240 V  
Frequency : 60; 50 Hz



## Features

### Design

- tempered glass surface, black
- Two built-in options:
  - Flush installation
  - Surface mounted installation: install the hob either flush or slightly raised on the worktop
- Cast iron pan supports with rubber feet

### Usage convenience

- FlameSelect with 9 steps: precisely control and adjust the flame in nine defined levels.
- Design co-ordinated control dials: easily access dials in front with strong grip for effortless turning.
- Ignition via control dials: just push and turn the dials to ignite the flame.

### Burners and power

- 4 burner hob
- Left front: Standard burner up to 1.75 KW (depending on gas type)
- Left rear: Standard burner up to 1.75 KW (depending on gas type)
- Right rear: High speed burner up to 3 KW (depending on gas type)
- Right front: Economy burner up to 1 KW (depending on gas type)

### Safety

- Flame failure safety device: prevents unwanted gas flow when flame goes out.

### Installation (gas types & measurements)

- Usable for: Nat gas L/LL G25/20mbar(DE)  
NG H/E 20mbar, E+ 20/25mbar  
Natural gas H 25 mbar (HU)  
Natural gas L 25 mbar (NL)  
Liquid gas G30,31 28-30/37mbar  
Liquid gas G30 37 mbar (PL)  
Liquid gas 50 mbar
- Factory set for connection to mains gas
- Nozzle set for LPG jets (28-30/37mbar) included. Nozzles for all other gas types can be ordered via the customer service. For nozzle change, please contact the customer service.
- Dimensions of the product (HxWxD mm): 58 x 590 x 520
- Required niche size for installation (HxWxD mm) : 45 x 560 x (480 - 492)
- Min. worktop thickness: 30 mm
- Power cord: 1 m
- Connected load: 7.5 KW

N 70, Gas hob, 60 cm, Tempered glass  
T26CS49S0

Dimensioned drawings

