

DA 3598

Slimline cooker hood
with energy-efficient LED lighting and light-touch switches for easy use.



- Filigree design - extremely slim canopy with a width of 892mm
- Unique user convenience – Con@ctivity
- Powerful - 635m³/h on the booster setting
- Energy-efficient and quiet - powerful ECO motor
- Safe and easy to clean - Miele CleanCover

EAN: 4002516003618 / material number: 10851430

Construction type	
Slimline cooker hood	•
Design	
Colour	Stainless steel
Operating modes	
Type of air guide	Convertible
Active charcoal filter (order separately)	DKF19-1
User convenience	
Electronic controls	•
Light-touch controls	•
Miele@mobile app	•
Power levels (number without Booster level)	3
Booster level	•
Programmable Booster level switch-off	•
Run-on time 5 / 15 min.	•
Grease filter saturation indicator programmable	•
Active charcoal filter saturation indicator programmable	•
Cleaning convenience	
Easy-to-clean canopy interior – CleanCover	•
Efficiency and sustainability	
PowerManagement system	•
ECO package	•
Appliance networking	
Miele@home	•
WiFiConn@ct	•
MobileControl	•
ShopConn@ct	•
Automatic function Con@ctivity 3.0 (WiFi)	•
Filter system	
Number of dishwasher safe stainless steel grease filters	2
Lighting	
LED	•
Light intensity in Lx	500
Colour temperature in K	3,500
Dimmer function	•
Fan	
Dual-action fan	•
ECO motor (DC motor)	•

DA 3598


Slimline cooker hood
with energy-efficient LED lighting and light-touch switches for easy use.



Air throughput with max. duct diameter in extraction mode (not for external version)	
Air throughput in Level 1 (m ³ /h)	190
Air throughput in Level 2 (m ³ /h)	290
Air throughput in Level 3 (m ³ /h)	400
Air throughput in Booster level (m ³ /h)	635
Sound power in Level 1 (dB(A) re 1 pW)	36
Sound power in Level 2 (dB(A) re 1 pW)	44
Sound power in Level 3 (dB(A) re 1 pW)	51
Sound power in Booster level (dB(A) re 1 pW)	63
Sound pressure in Level 1 (dB(A) re 20 µPa)	22
Sound pressure in Level 2 (dB(A) re 20 µPa)	30
Sound pressure in Level 3 (dB(A) re 20 µPa)	37
Sound pressure in Booster level (dB(A) re 20 µPa)	49
Air throughput in recirculation mode	
Air throughput in Level 1 (m ³ /h)	140
Air throughput in Level 2 (m ³ /h)	225
Air throughput in Level 3 (m ³ /h)	365
Air throughput in Booster level (m ³ /h)	530
Sound power in Level 1 (dB(A) re 1 pW)	46
Sound power in Level 2 (dB(A) re 1 pW)	55
Sound power in Level 3 (dB(A) re 1 pW)	65
Sound power in Booster level (dB(A) re 1 pW)	73
Sound pressure in Level 1 (dB(A) re 20 µPa)	32
Sound pressure in Level 2 (dB(A) re 20 µPa)	41
Sound pressure in Level 3 (dB(A) re 20 µPa)	51
Sound power in Booster level (dB(A) re 1 pW)	59
Safety	
Safety switch-off	•
Technical data	
Canopy width in mm	892
Canopy height in mm	37
Canopy depth in mm	309
Minimum height above electric hobs in mm	450
Minimum height above gas hobs (max. 12.6 kW total power, burner ≤ 4.5 kW) in mm	650
Net weight in kg	18.0
Length of supply lead in m	1.5
Total rated load in kW	0.09
Voltage in V	230
Fuse rating in A	10
Number of phases	1
Installation notes	
Extraction ducting connection at top	•
Extraction connection at top and rear	•
Diameter of extraction ducting connection in mm	150
Combination with WiFi-enabled Miele hob	recommended
Standard accessories	
Non-return flap	•
Adapter to reduce ducting diameter from 150 mm to 125 mm Ø	•

DA 3598

Slimline cooker hood
with energy-efficient LED lighting and light-touch switches for easy use.

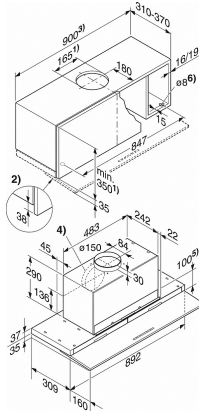

Installation drawings DA 3598, DA 3598 EXT

1. Vented, recirculation with DUJ 150, when air is directed through a cut-out in the roof of the housing unit.
2. Housing unit carcass is 38 mm shorter than the door.
3. Installation is also possible in a 60 cm wide housing unit. In this case the cabinet door must open upwards to allow access to the grease filters. This also applies to adjacent cabinets.
4. Vent connection alternatively to the rear.
5. After the wall unit has been installed, a partition can be fitted. The slots for grease filters and odour-absorbing filters for use in recirculation mode must be accessible.
6. If the hood is installed in a wall unit with a base, openings must be provided to enable adjustment of the retaining force of the deflector plate.

Examples:

- a) The wall unit features side sections, as shown here.
- b) The cooker hood is installed in a 60 cm wide wall unit with adjacent cabinets.

In regard to dimensions for wall unit height and cut-outs, fitted accessories should be taken into account (e.g. silencers, XKM module).